


DS2301NF

AC-DC Power Supply

(Document Rev A04 09/17/15)

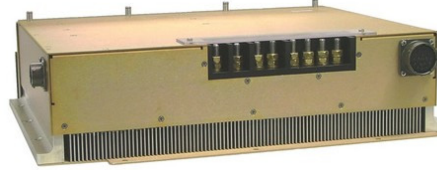

**Three Phase Delta @ 60Hz 115Vac
Multiple (7) Output, 1442W Max Total**

Market: Mil-COTS Naval Ship

Application: Military Ship Radar System VME Rack display panel

Features

- Enclosed Ruggedized Case.
- Attachable fan tray for cooling.
- Designed to meet portions of MIL-STD-167-1* Vibration.
- Designed to meet portions of Mil-S-901D* Shock standard.
- Designed to meet portions of Mil-STD-461E * EMI standard.
- Designed to meet portions of MIL-STD-810* salt/fog, attitude, and humidity standard.

* Designed to meet portions of these particular standards. Contact AEGIS Power Systems for specific details. Standards met with appropriate airflow (Attach AEGIS P/N DS2301FT).

Table 1: Maximum Ratings

Parameter	Rating	Unit	Notes
Temperature	0 to +60 -40 to +70	°C	Operating Non-Operating
Output Power	1442	W	
Input power	2060	W	(Without fan tray attached.)
Max +28Vdc output 1	644	W	23A
Max +15Vdc output 2	90	W	6A
Max +12Vdc output 3	72	W	6A
Max +5Vdc output 4	400	W	80A
Max +3.3Vdc output 5	116.6	W	32.5A
Max -12Vdc output 6	60	W	5A
Max -15Vdc output 7	60	W	4A

Product Highlights

Designed for integration into naval ship radar equipment, the DS2301NF is a ruggedized power supply that consumes 2134 Watts of 3 phase delta AC power (including attached fan power) and converts it into 1442 Watts of combined DC output power. It features 7 Outputs with remote sense capability and a DC OK power indicator. This model includes a removable / replaceable fan tray. Spare fan tray can be purchased separately as part number DS2301FT.

AEGIS Power Systems, Inc. specializes in the front end design, development, and manufacture of Rapid Response Custom Switching Power Supplies for Mil-COTS, defense, industrial, telecomm, aircraft, shipboard, rack mount, and electric powered vehicle applications. Contact Aegis for specific details on what portions of a particular military standard is offered for this power converter power supply.

SPECIFICATIONS

(Typical at 25°C, nominal line and 100% load, unless otherwise specified.)

Input voltage:	115/208Vac ($\pm 7\%$), 3 phase delta @ 60Hz ($\pm 3\%$).
Input current:	10A Max @ 115Vac.
Input power:	2060W maximum. No fan tray attached. (2134W with fan tray attached.)
Power factor:	0.99 Typical.
Output power:	1442W maximum combined total output.
Holdup time:	Contact Aegis.
Output voltages:	+28Vdc, ± 12 Vdc, ± 15 Vdc, +5Vdc, & +3.3Vdc. See table 2.
Efficiency:	70% Minimum 73% typical.
Output ripple:	28Vdc out 100mVpk-pk; all other outputs 50mV pk-pk (20MHz BW). Table 2.
Current Limit:	Short circuit protected with automatic recovery.
Voltage set point:	$\pm 0.5\%$.
Line/Load regulation:	$\pm 0.2\%$.
Temperature regulation:	$\pm 0.01\%$ / °C.
Temperature:	0°C to +60°C operating; -40°C to +70°C non-operating.
Cooling:	Forced air fan cooling through cooling fins.
Package:	Enclosed metallic case. Removable, replaceable fan tray.
Dimensions:	4" H x 15.44" W x 13" L (No Fan Tray). 4" H x 16" W x 13" L (With Fan Tray).
Weight:	34 lbs maximum.
Connector:	Input (PT02E-145P); Output (PT02E-20-16S). See Table 3.
Status Indicator:	DC OK: Relay contact: Closed=OK; Open=Fail.
Remote Sense:	2V compensation (output 1); 0.5V compensation (outputs 4 & 5)
Vibration:	Designed to meet portions of MIL-STD-167-1
Shock:	Designed to meet Mil-S-901D; 30Gs, 80ms half-sine, three axis.
Humidity:	0 – 95% non-condensing.
EMI:	Designed to meet portions of MIL-STD-461E EMI standard.

Specifications subject to change without notice.



Table 2: DS2301NF Voltage Outputs

Output	Vdc out	Watts out	Amps out	Max Limit Mode	Ripple (20MHz BW)
V1	+28Vdc	644W	23A	28A	100mVp-p
V2	+15Vdc	90W	6A	9	50mVp-p
V3	+12Vdc	72W	6A	11	50mVp-p
V4	+5Vdc	400W	80A	156	50mVp-p
V5	+3.3Vdc	116W	35.2A	54	50mVp-p
V6	-12Vdc	60W	5.0	11	50mVp-p
V7	-15Vdc	60W	4.0	9	50mVp-p

Table 3: DS2301NF Connector Pin Outs

Output Connector		Input Connector	
PT02E-14-5P		PT02E-20-16S	
CN1 Pins	Signal Name	CN2 Pins	Signal Name
A	Fault N.O.	A	Phase A Input
B	Fault Common	B	Phase B Input
C	+28VSens Pos	C	Phase C Input
D	+28VSens Neg	D	Input Ground
E	+5VSens Pos	E	N/A
F	+5VSens Neg		
G	+3.3VSens Pos		
H	+3.3VSens Neg		
J	+15Vdc		
K	+15Vdc RTN		
L	+12Vdc		
M	+12Vdc RTN		
N	-15Vdc		
P	-15Vdc RTN		
R	-12Vdc		
S	-12Vdc RTN		

- NOTES: UNLESS OTHERWISE SPECIFIED
1. INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M-1994
 2. MATERIAL: N/A
 3. FINISH: N/A

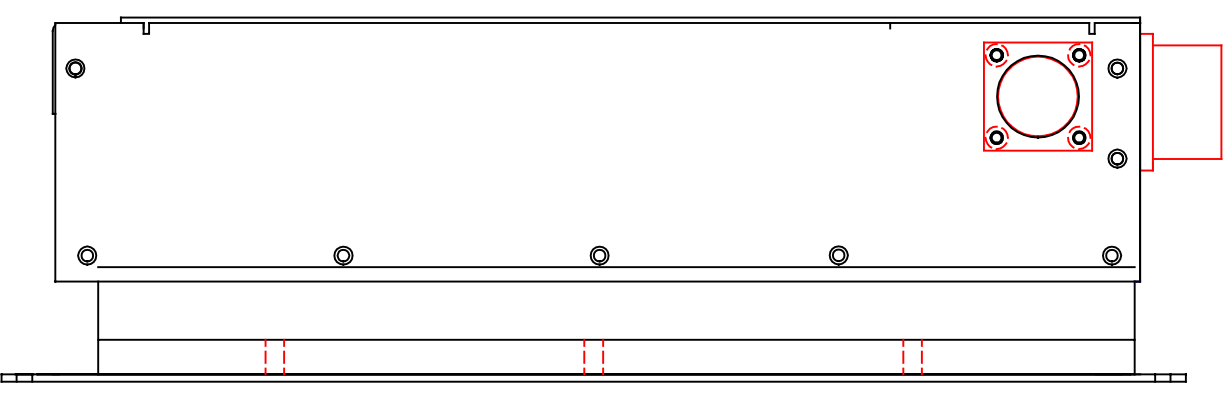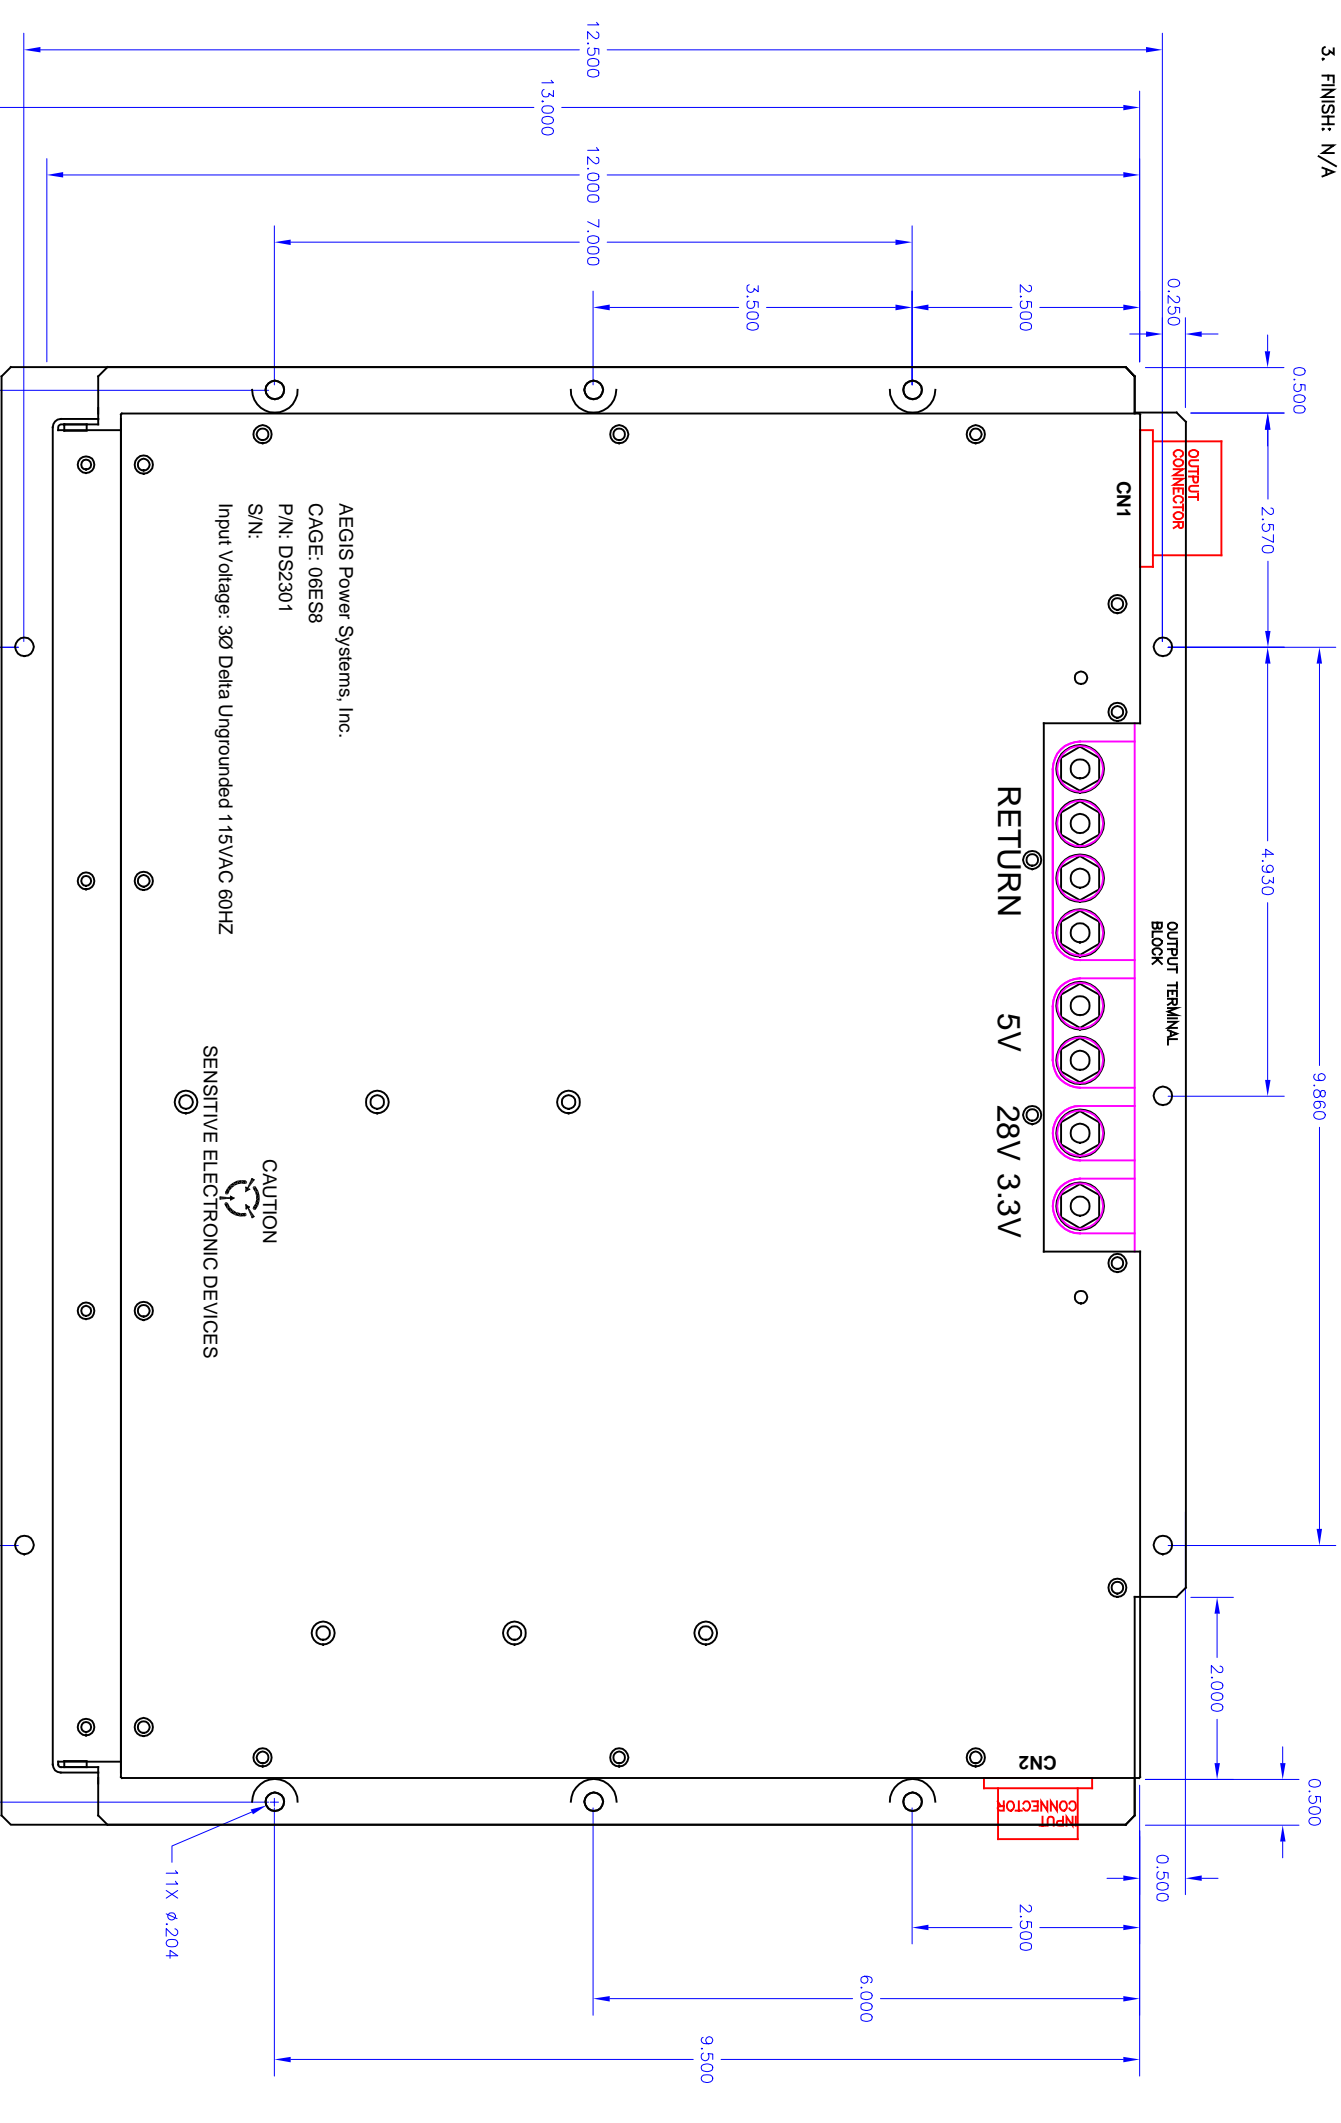

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

ZONE	REV	DESCRIPTION	DATE	APPROVED
	A01	INITIAL RELEASE	09/08/03	M.Mason
	A02	MOUNTING BRACKET MOD.	11/03/03	M.Mason
	A03	FAN TRAY MOD.	1/25/04	M.Mason

AEGIS Power Systems, Inc.
 CAGE: 06ES8
 P/N: DS2301
 S/N:
 Input Voltage: 3Ø Delta Ungrounded 115VAC 60HZ

CAUTION
 SENSITIVE ELECTRONIC DEVICES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ± .02, FRACTIONS ± .005, DIA ± .005, ANGLES ± .5°

AEGIS POWER SYSTEMS, INC. PROPRIETARY INFORMATION. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART HEREOF MAY BE MADE EXCEPT BY EXPRESS WRITTEN PERMISSION OF AEGIS POWER SYSTEMS, INC.

CONTRACT NO.	APPROVALS	DATE	TITLE
	M. MASON	09/08/03	DS2301 POWER UNIT NO FANS
			AEGIS P/N: DS2301NF
			MURPHY, NORTH CAROLINA
			SIZE: FSCAL NO. D 06ES8
			DWG NO. DS2301-M24
			REV. A03
			SCALE 1/1
			SHEET 1 OF 1

