

UHP3AC9K

Overview

AC-DC Power Supply, Water Resistant (Sealed Enclosure), Three Phase 50/60Hz 208Vac Input (Line-Line), +28 Output, 9000W Max

Market(s)

Defense, Industrial

Typical Application(s)

Electronic equipment rack, Onboard vehicle power



Product Highlights

This ruggedized military Commercial Off the Shelf (COTS) power supply operates from a 3-Phase 208Vac input. The single 9000W output capability is the power supply solution for military COTS applications. It is designed to meet the environmental requirements of MIL-STD-810F and EMI requirements of MIL-STD-461F. In comparison to other power supplies using conventional technology, this package provides users with higher efficiency (83% typical), less weight, and higher power output. This power supply is designed to power military electronic equipment including communication centers. Contact Aegis Power Systems, Inc. for specific details on what applicable portions of a military standard is offered for this power converter power supply.

Features

- 3 Phase 208Vac
- MIL-STD-810F Environmental *
- MIL-STD-461F EMI *
- MIL-STD-1275E +28V Vehicle Power *
- MIL-STD-1472F Safety Markings *
- Enclosed case power supply
- Conformal Coated Circuit Boards

Table 1: Maximum Continuous Operating Ratings

Parameter	Rating	Unit	Notes
Vin max range	182 to 216	Vac	Line to Line (Neutral not connected)
Temperature	-20 to +50	°C	-40 to +100 Non-operating
Output Power	9000	W	(+50°C)
Input power	10840	W	(+50°C)
Max output	9000	W	Refer to Table 2 (Output)

* Designed to meet applicable portions of this standard. Contact Aegis Power Systems, Inc. for specific details.

About Us

Aegis Power Systems, Inc. specializes in the design, development, and manufacture of AC-DC and DC-DC power supplies for high-performance, rugged, critical, and specialty applications. Markets served include defense, industrial, communications, aircraft, shipboard, rack mount, embedded computing, and electric vehicle applications. Contact us to find out if this item can be configured or redesigned to meet your specific technology need.

SPECIFICATIONS

(Typical at 25°C, nominal line and 100% load, unless otherwise specified.)

Input Voltage	3 Phase, 208Vac L-L, 50/60 Hz, Nominal. Input range 47 - 63Hz, 182Vac - 216Vac Line-Line.
Input Current	32A per phase (9000W Output)
Input Power	10840W (9000W Output)
Power Factor	.97 (Passive Power Factor Correction)
Holdup Time	Contact Aegis Power Systems, Inc. for more details
Output Power	9000W Maximum
Output Voltages	+28Vdc - See table 2 for details
Efficiency	83% Nominal, 81% Minimum.
Output Ripple	See table 2.
Current Limit	Short circuit protected with automatic recovery
Start-Up Time	1 to 2 seconds
Voltage Set Point	25-30Vdc for +28VDC output (@25C ambient)
Line/Load Regulation	+/- 2%
Output Voltage Temperature Coefficient	-3.73 mV / °C.
Temperature	-20°C to +50°C Operating / -40°C to +100°C Non-operating
Cooling	Forced Fan Cooling. (Fans come on when needed.)
Package	Enclosed case chassis mounted.
Dimensions	8.44" D x 18" W x 25" H
Weight	115 lbs. maximum
Connectors	AC Input Connector MIL-DTL-22992 P/N: MS90558C32413P +28VDC Output Connectors, 1/2" Lugs, one Pos, one Neg.
Environmental	Designed to meet applicable portions of MIL-STD-810F, Ground Mobile
Humidity	0 – 95% non-condensing
EMI	Designed to meet applicable portions of MIL-STD-461F Requirement: CE102, CS101, CS114, and RE102. (Ground Range)

Specifications subject to change without notice.

Table 2: Voltage Output (Nominal)

UHP3AC9K-01	V1			
Voltage	+28Vdc			
Current	322A			
Power	9000W			
Ripple	280mVpk-pk*			

* 20MHz Bandwidth Limited.

Table 3: Connector Specifications

AC Input Connector MIL-DTL-22992 P/N: MS90558C32413P

Contact Designation	Conductor Circuit
A	PHASE A
B	PHASE B
C	PHASE C
N	NEUTRAL (not connected)
G	SAFETY GROUNDING

Status Connector P/N: MS3474W12-8S.

Contact Designation	Conductor Circuit
A	AC OK Collector *
B	DC OK Collector*
C	Over Temp * **
D	Enable Anode
E	Enable Cathode
F	
G	+5V Standby
H	Standby Return

*Common emitter internally tied to +5V Standby Return.

**Normally closed thermal switch (Open @ 90°C)


DC Output Studs

Connection	Circuit
Black ½" Stud	Return for DC output
Red ½" Stud	+28V Output

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M-1994.
2. FINISH: ROHS COMPLIANT CLEAR NON-CROMATE CHEMICAL FILM PER MIL-C-5541 CLASS 3, (IN ACCORDANCE WITH MIL-DLT-81706, TYPE II, CLASS 3).
3. MATERIAL: 6061-T6 ALUMINUM ALLOY

DWG NO.		2		SH	REV
REVISIONS					
ZONE	REV	DATE		APPROVED	
	A01	INITIAL RELEASE		TBL	

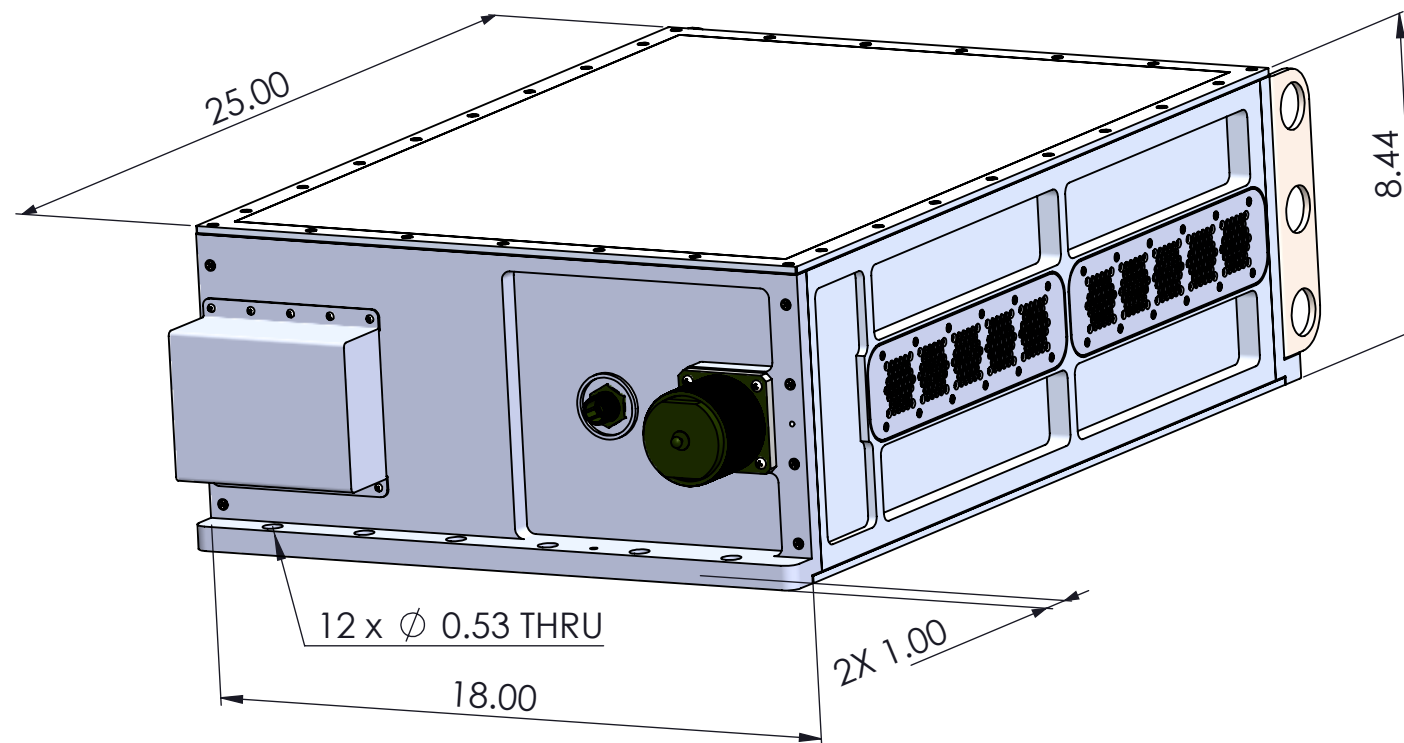

AEGIS POWER SYTEMS, INC. PROPRIETARY INFORMATION. NODISCLOSURE, REPRODUCTION, OR USE OF ANY PARTY HERE OF MAY BE MADE EXCEPT BY EXPRESS WRITTEN PERMISSION OF AEGIS POWER SYTEM, INC.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ± N/A
 DEGREES: ± .5
 TWO PLACE DECIMAL ± .02
 THREE PLACE DECIMAL ± .005

REFER TO 3D PART :	
MATERIAL	SEE NOTE 2
FINISH	SEE NOTE 3
	DO NOT SCALE DRAWING

CONTRACT NO.		
APPROVALS	NAME	DATE
DRAWN	TL	9/18/18
CHECKED	MVM	
ENG APPR.	TL	
MFG APPR.	JM	
Q.A.	MH	

**AEGIS POWER SYSTEMS
MURPHY, NORTH CAROLINA**

TITLE:
UHP3AC9K02HS
 AEGIS P/N: ULTRA HIGH POWER SERIES

SIZE	FSCM NO.	DWG. NO.	REV
B	06ES8		

SCALE: 1:5 SHEET 1 OF 1